Ακροδεκτες Δακτυλιου Ναιλον Συνεχους Ψυχρης Εκθλιψης, 2000PCS/Ρολο

Model No. JW-TM01



SPECIFICATIONS

Υλικο	Χαλκος
Θερμοκρασια Υλικου	75/105 βαθμοι
Θηκη	Ναιλον PVC
Επεξεργασια Επιφανειας	Επικασσιτερωση
Ποσοτητα	2000PCS/Ρολο

ακροδεκτης δακτυλιου συνεχους ψυχρης εκθλιψης με μονωση ναιλον Μπλε ακροδεκτες ακρου κορδονιου, ακροδεκτες δακτυλιου συνεχους ψυχρης εκθλιψης με μονωση ναιλον Μπλε ακροδεκτες ακρου καλωδιου, ακροδεκτες συνεχους ψυχρης πιεσης, ακροδεκτες ακρου ακρου καλωδιου μονωμενου καλωδιου, ακροδεκτης μονωμενου δακτυλιου με μονωση απο ναιλον PVC
Η εξαιρετικη και καλη επιλογη υλικων καθιστα το προϊον υψηλη αποδοση ασφαλειας και μεγαλη διαρκεια ζωης.
Καταλληλο για συνδεση εξοπλισμου σε μοναδες διανομης ισχυος.
Υλικο Θερμοκρασια χαλκου
75/105 βαθμοι
Θηκη Ναιλον PVC
Επεξεργασια επιφανειας Επικασσιτερωση
Q.ty 2000PCS/Ρολο





With insulation sheath blade terminal


Current: 18A-48A
Copper has good conductivity
Flame retardant and tinned



With insulation sheath spring terminal




Reliable quality of real materials
Exquisite and good selection of materials makes the product high safety performance and long service life
Copper tinned terminal block
High-quality red copper conductive must be strong
Surface tin plating process to resist oxidation
PVC insulation
Flame retardant material
Two materials optional
Nylon insulation
Flame retardant material

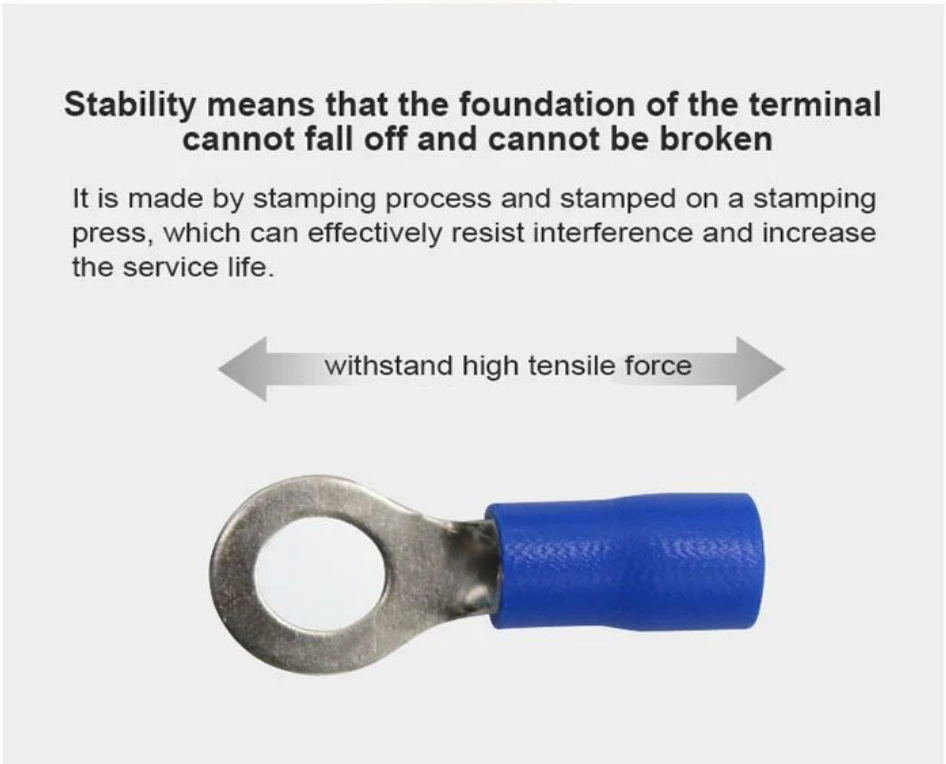
Stability means that the foundation of the terminal cannot fall off and cannot be broken
It is made by stamping process and stamped on a stamping press, which can effectively resist interference and increase the service life.
withstand high tensile force

With insulating sheath round terminal


Flame retardant tin plating, good electrical conductivity


Maximum current: 19A-48A
Bolt diameter: 3.2~10.5mm



Sample renderings display

Applicable cord

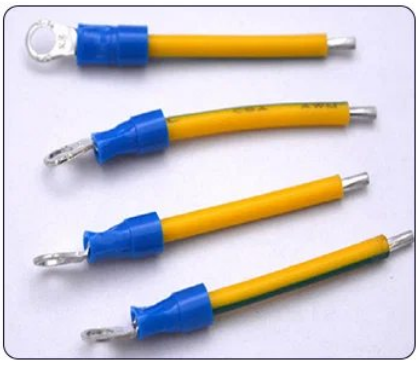

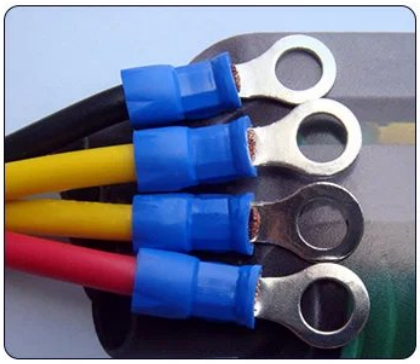
Product parameters

Material: copper
Temperature: 75℃/105℃
Sheath: Nylon/PVC
Surface Treatment: Tin Plating





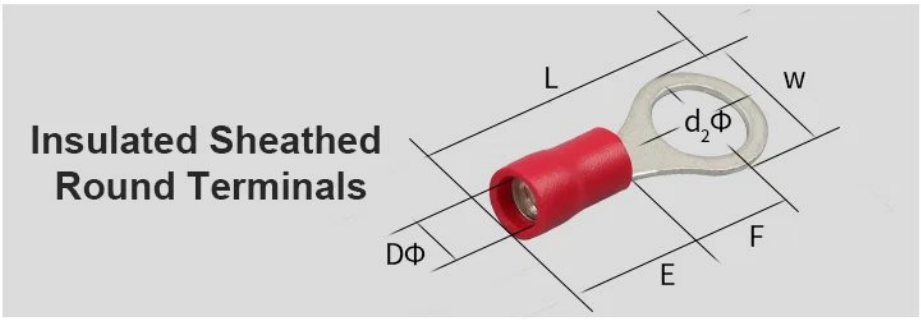

Red (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	Size				DΦ
						W	L	F	E	
RVN1.25-3	0.5-1.5 (22-16)	0.75	19A	#4	3.2	5.7	18.5	5.0	10.0	4.0
RVN1.25-3.5 S				#6	3.7	5.7	185	5.0		
RVN1.25-3.5M				#6	3.7	6.6	20.0	6.3		
RVN1.25-35 L				#6	3.7	8.0	215	7.0		
RVN1.25-4 S				#8	4.3	6.6	19.5	63		
RVN1.25-4L				#8	4.3	8.0	21.5	7.0		
RVN1.25-5S				#10	5.3	8.0	21.5	7.0		
RVN1.25-5L				#10	5.3	9.8	23.5	8.5		
RVN1.25 6S				1/4	6.4	9.8	23.0	8.5		
RVN1.25-6L				1/4	6.4	11.6	27.5	11		
RVN1.25-8				5/16	8.4	11.6	27.5	11		
RVN1.25-10				3/8	10.5	13.6	31.6	14		

Blue (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	Size				DΦ
						W	L	F	E	
RVN2-3	1.5-25 (16-14)	0.8	27A	#4	3.2	6.6	17 3	4.3	10.0	4.6
RVN2-35S				#6	3.7	6.6	17.3	4.3		
RVN2-3.5 M				#6	3.7	6.6	19.5	6.5		
RVN2-3.5 L				#6	3.7	8.5	21.8	7.7		
RVN2-4 S				#8	4.3	6.6	19 5	6.5		
RVN2-4L				#8	4.3	8.5	21 8	7.7		
RVN2-5 S				#10	5.3	8.5	21.8	7. 7		
RVN2-5L				#10	5.3	9.5	21.8	7.2		
RVN2-6				1/4	6.4	12.0	26.8	11.0		
RVN2-8				5/16	8.4	12.0	26.8	11.0		
RVN2-10				3/8	10.5	14.6	31.5	14		

Black (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	Size				DΦ
						W	L	F	E	
RVN3.5 4	2.5~4.0 (14-12)	1.0	37A	#8	4.3	8.0	24.5	7.7	13.0	6.5
RVN35-5 S				#10	5.3	8.0	24.5	7.7		
RVN3.5-5 L				#10	5.3	12.0	27.9	8.6		
RVN3.5-6				1/4	6.4	12.0	27.9	8.6		
RVN35-8				5/16	8.4	15.0	34.0	14		
RVN3.5-10				3/8	10.5	15.0	34.0	14		

Yellow (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	W	L	F	E	DΦ
RVN5.5-3	4~6 (12-10)	1.0	48A	#4	3.2	7.2	22.7	5.9	14	7
RVN5.5-3.5				#6	3.7	7.2	22.7	5.9		
RVN5.5-4S				#8	4.3	7.2	22.7	5.9		
RVN5.5-4L				#8	4.3	9.5	26.3	8.3		
RVN5.5-5				#10	5.3	9.5	26.3	8.3		
RVN5.5-6				1/4	6.4	12.0	30	11		
RVN5.5-8				5/16	8.4	15.0	34.5	13.7		
RVN5.5-10				3/8	10.5	15.0	34.5	13.7		

Function Features

