
Οριζόντιο Καλούπι Πτύχωσης OTP για Τερματικές Μηχανές

Model No. JW-AP11

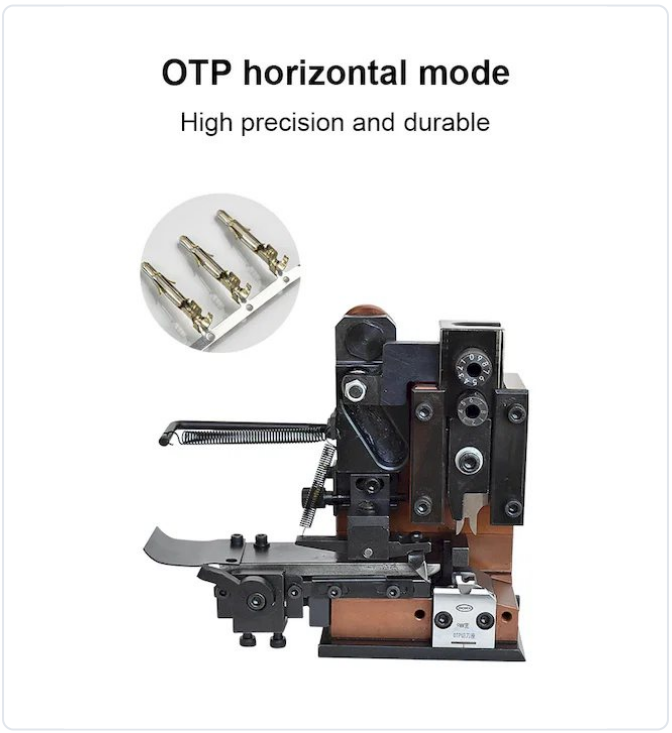

SPECIFICATIONS

Καλούπια πτύχωσης ακροδεκτών OTP (οριζόντια λειτουργία OTP) μήτρα εφαρμογής μηχανής πτύχωσης σύρματος για την τερματική μηχανή, μηχανή πτύχωσης τερματικού JST, καλούπι σχήματος U OTP, εφαρμογή τερματικού μηχανήματος, καλούπι Otp, καλούπι τερματικού όtp, μήτρα τερματικού έφαρμογής καλούπι OTP Οριζόντια και καθετα καλούπια πτύχωσης, τερματική έφαρμογή, μήτρα, καλούπι OTP, οριζόντια και καθετα καλούπια πτύχωσης

Καλούπια πτύχωσης ακροδεκτών OTP, οριζόντια λειτουργία OTP, εφαρμοστής μηχανής πτύχωσης σύρματος, μήτρα για τερματική μηχανή Τερματική μηχανή
Super mute, με χρήση τεχνολογίας υψηλής συχνότητας, ακριβής τοποθέτηση ηλεκτρονικών. Ο θόρυβος λειτουργίας του κινητήρα είναι μικρότερος απο τον παραδοσιακο άκροδέκτη κατα την πτύχωση, εξοικονομεί ηλεκτρική ένέργεια, η λειτουργία μεταφοράς είναι πιο βολική και αποφεύγει τις κοινές βλαβες καθως συναντώνται οι παραδοσιακοί ακροδέκτες συμπλέκτη/ηλεκτρομαγνητικής βαλβιδας.
Το χαρακτηριστικο έφαρμογής τερματικου ΌΤΡ: Υψηλη άκριβεια και ανθεκτικο

OTP horizontal mode

High precision and durable



Mold general

Suitable for a variety of molds, widely used







Horizontal mode





Vertical mode





Single grain




OTP straight mold

Model: OTP straight mold
Weight: 4.5KG
Feeding block: 35mm
Slider stroke: 30mm
Die knife adjustment: scale rotary
Process type: stamping mould
Main processing equipment: terminal crimping
Provide customized processing: Yes

OTP single grain mold

Model: OTP single grain mold
Weight: 4.5KG
Feeding block: 35mm
Slider stroke: 30mm
Die knife adjustment: scale rotary
Process type: stamping mould
Main processing equipment: terminal crimping
Provide customized processing: Yes

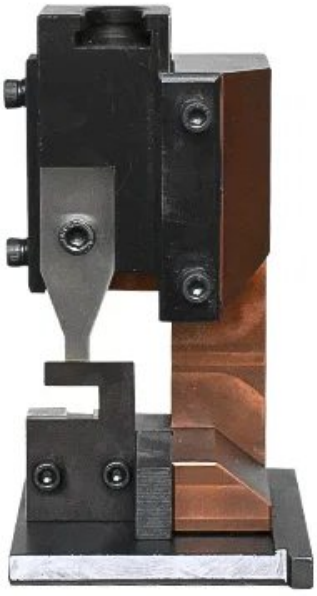



Single U-shaped mold

Model: Single U-shaped mold

Weight: 4.5KG

Feeding block: 35mm

Slider stroke: 45mm

Die knife adjustment: scale fine adjustment

OTP U mold



Model: OTP U-shaped mold

Weight: 4.5KG

Feeding block: 25mm

Slider stroke: 30mm

Die knife adjustment: scale rotary

Process type: stamping mould

Main processing equipment: terminal crimping

Provide customized processing: Yes



Flag model

Model: Flag mold


Weight: 6.5KG

Feeding block: 25mm

Slider stroke: 30mm

Die knife adjustment: scale fine adjustment

2000#mold

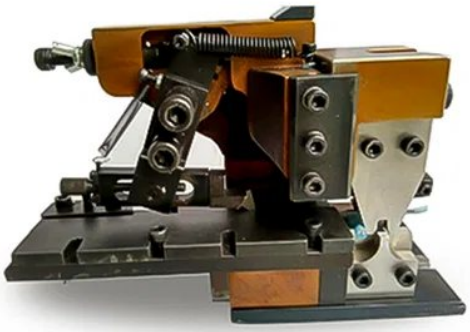

Model: 2000#mold

Weight: 5.2KG

Feeding block: 35mm


Slider stroke: 40-48mm

Die knife adjustment: scale rotary

Process type: stamping mould

Main processing equipment: terminal crimping

Provide customized processing: Yes

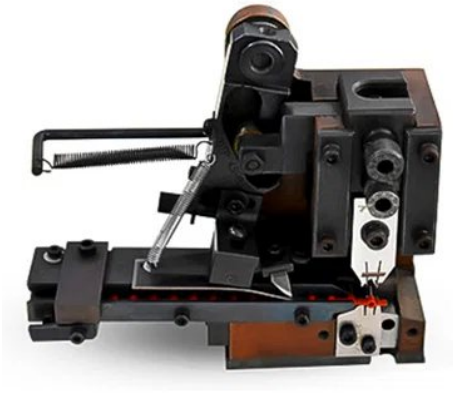

Plastic mould

Model: Plastic with mold

Weight: 4.5KG

Feeding block: 35mm

Slider stroke: 30mm

Die knife adjustment: scale rotary

Process type: stamping mould

Main processing equipment: terminal crimping

Provide customized processing: Yes

OTP high precision horizontal mold



Feeding method: horizontal feed
Feeding stroke: 30mm
Slider stroke: 30mm
Scope of application:
It is suitable for high-precision terminal and connection wire manufacturers with very high requirements for crimping. The ingredients are QPQ and heat-treated fine embroidery technology, which can make the product size more accurate, and it is common with JAM, Xinming and terminal machines.



4S-40 pneumatic horizontal die

Feeding stroke: 40mm
Slider stroke: 40mm
Scope of application: suitable for European and American series automatic and semi-automatic crimping equipment, C.H/I.H adjustment accuracy is 0.02mm, suitable for various horizontal terminals

4E-40 pneumatic straight mold



Feeding stroke: 40mm
Slider stroke: 40mm
Scope of application: suitable for European and American series automatic and semi-automatic crimping equipment, C.H/I.H adjustment accuracy is 0.02mm, suitable for various straight terminals



4S-30 pneumatic horizontal die

Feeding stroke: 40mm

Slider stroke: 30mm

Scope of application: It is suitable for Japanese series automatic and semi-automatic crimping machines and domestic 30-stroke terminal machines. The crimping knife is common with OTP, and the C.H/I.H adjustment accuracy is 0.02mm.

4E-30 mechanical straight mold



Feeding method: direct delivery

Feeding stroke: 30mm

Slider stroke: 30mm

Scope of application: suitable for automotive terminals, can be used for conventional terminal machines, fine-tuning single grid is 0.02mm, large adjustable range, high precision.



JST horizontal mode

Feeding method: horizontal feed
Feeding stroke: 30mm
Slider stroke: 40mm
Scope of application: suitable for JST automatic terminal machine and hand punching machine.

JST straight mold

Feeding method: direct delivery
Feeding stroke: 30mm
Slider stroke: 40mm
Scope of application: Suitable for JST automatic terminal machine and 40 stroke terminal machine.






JST flag mold

Feeding method: direct delivery
Feeding stroke: 30mm
Slider stroke: 40mm
Scope of application: 187/205/250 flagship terminal matching mold, 40 stroke terminal machine.

4TS precision horizontal mold

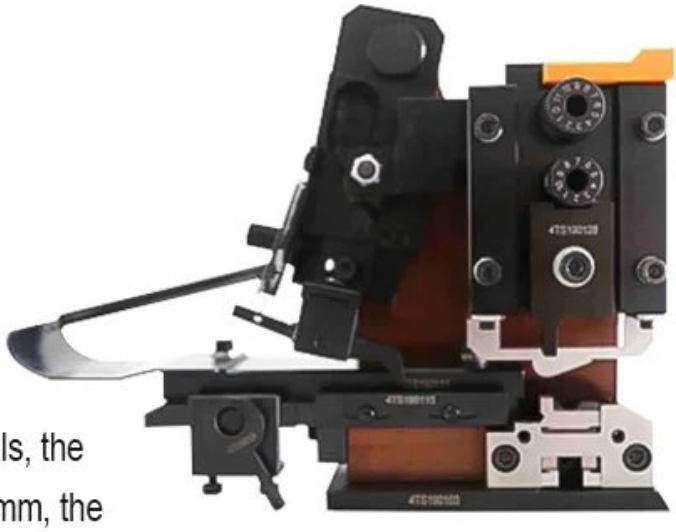

Feeding method: horizontal feed
Feeding stroke: 40mm
Slider stroke: 30mm
Scope of application: suitable for all kinds of large-stroke terminals, the large and fine adjustment is 0.025mm, the small and fine adjustment is 0.15mm, the upper knife width is 26mm, and the lower knife width is 30mm. Suitable for conventional terminal machines.

4TE precision straight mold



Feeding method: direct delivery
Feeding stroke: 40mm
Slider stroke: 30mm
Scope of application: suitable for all kinds of large-stroke terminals, the large and fine adjustment is 0.025mm, the small and fine adjustment is 0.15mm, the upper knife width is 26mm, and the lower knife width is 30mm. Suitable for conventional terminal machines.

OTP terminal crimping molds, OTP horizontal mode, wire crimping machine applicator, die for terminal machine